


access control time attendance S700

[time attendance system china](#)

Parameters:

Display/Speaker	Language
LCD Display: 3 TFT touch LCD	Multi Language, English, French, Spanish, Arabic,
Speaker: Voice Prompt (language can be selected)	etc., for more than 40 languages can be selected
Technical Specifications Capacity	Environment
Card capacity: 30,000	Operation temperature: 0°C ~ 45°C
Log capacity: 50,000	Operation humidity: 20% ~ 80%
Verification/Identification	Verification/Identification
Verification speed(1:1): ≤0.5s	FRR: ≤0.01%
Identification speed(1:N): ≤1s	FAR: ≤0.0001%
Communication	Attendance status
TCP/IP, USB Host	Check in, Check out, Break in, Break out, OT in, OT out
Function Support	Customize Function
Auto status, DST; SMS, T9 input, 9 User ID, Photo-ID; Multi-verify	rf card reader, , webserver, FLASH disk
Power Supply	Machine Size
Power: 110/220VAC ~ 12VDC (PS-3A is optional)	250(L)*150(W)*90(H)mm
Access Mode	Access Control
Card, PIN, Card+PIN	built-in relay, 50 time zones, 5 groups and 10 combinations; 3rd electric lock, Door sensor, Exit button, Alarm

Application: home, office, school, government, building , or other purpose.

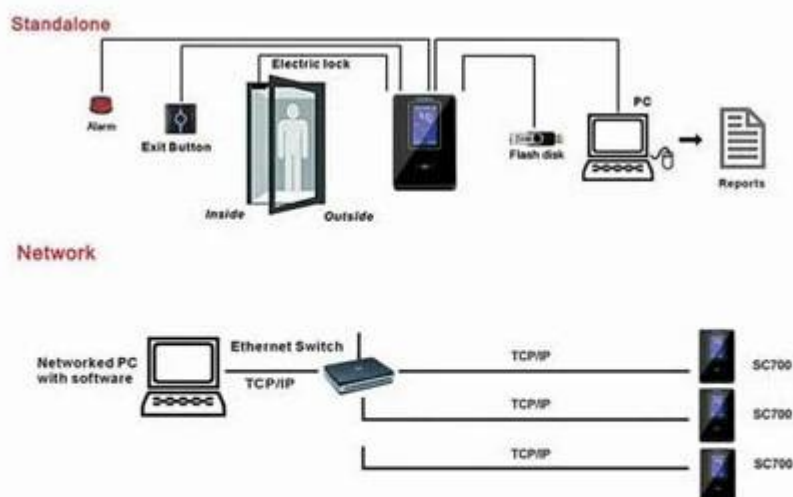

[shenzhen Attendance machine wholesales, RF ID card Time attendance distributor](http://www.shenzhen-attendance.com)

