

:
UHF " " .

UHF " " ! "

:
868 ~ 860 MHz 902 ~ 928MHz ()
12dbi
15-8 m
ISO18000-6B ISO18000-6C (EPC CLASS1 G2)
VC SDK
RS232 RS485 TCP / IP (optioinal).
* .

:
12-8 V
64 & lt6 ms
LED
95 ~ 20
227mm x 227mm x 60MM
2.5 KG
5-3

:
12 + : VDC : GND
: DATA0 485 R- 232 : XD
: DATA1 485 R + 232 : TXD
: : GND




□□□ □□ □□□□ □□□□ □□□□ □□□□□ □□□□□□ □□□□□□:



□□□□□□ □□□□ □□□□□ □ □□□ □□□□□□ □□□□□ □□□□□



□□□□ □□□□ □□□□ □□□□ UHF □□□□ □□ □□□□

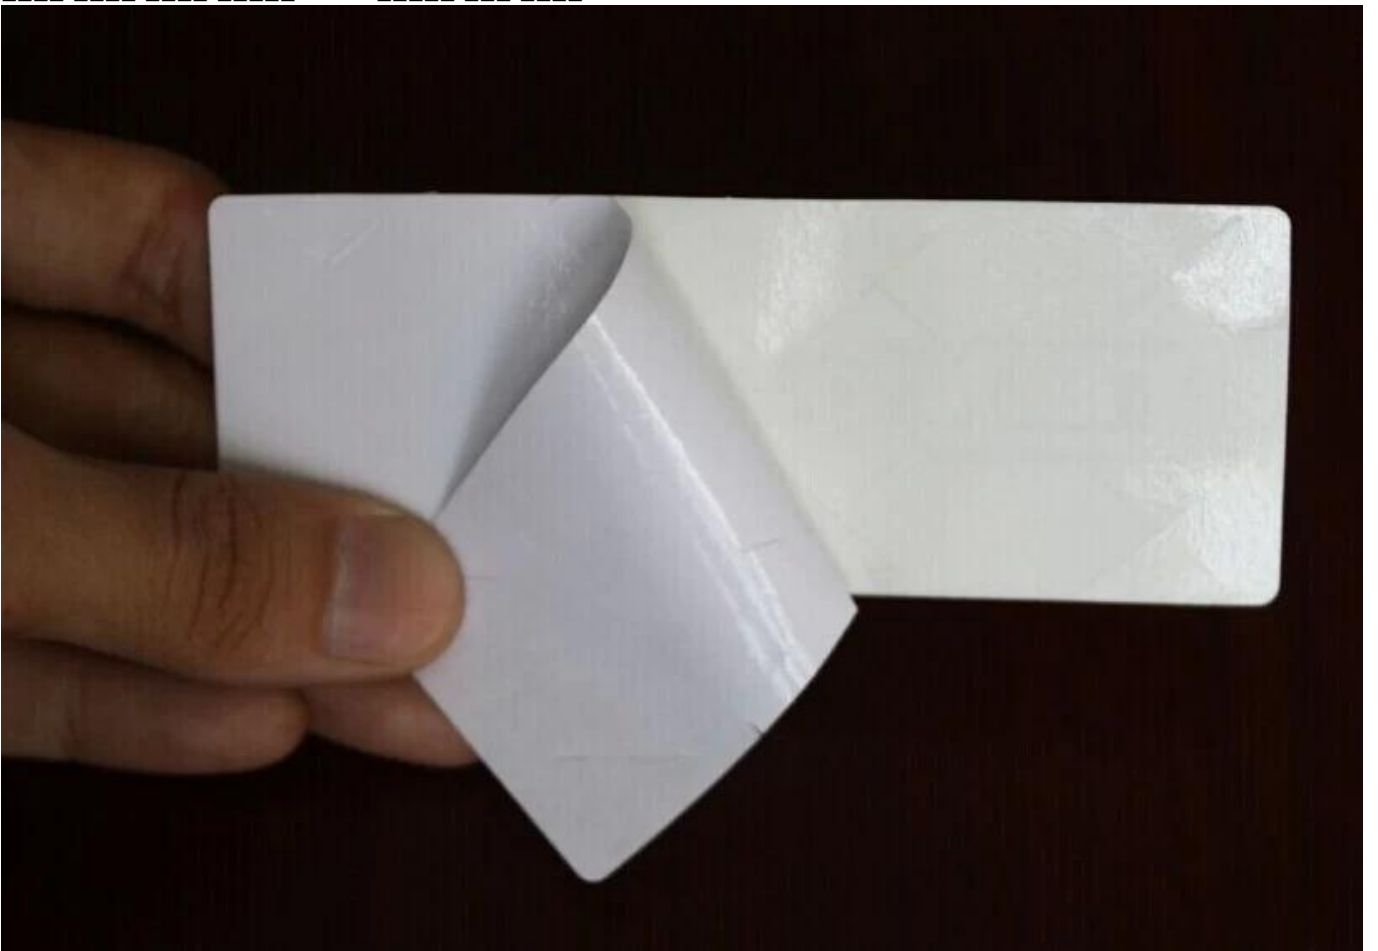

□□□□□□ □□ □□□□□□ □□□ □□□□□□ □□□ □□□□□□ □□□□.