


RF

RF ID

- A MIFARE® USB
- B USB
- C EM

- 1 Zink
- 2
- 3
- 4

|                               |                                            |
|-------------------------------|--------------------------------------------|
| Working voltage               | 6.0V (4 pieces of No.5 alkaline batteries) |
| Static current                | ≤15 μA                                     |
| Card reading current          | ≤20 mA                                     |
| Lifespan of batteries         | 10 months or above                         |
| Indication of lacking voltage | 4.8V                                       |
| Induction distance            | >25mm                                      |
| Working temprature            | -20`C~70`C                                 |
| Working humidity:             | ≤80%                                       |

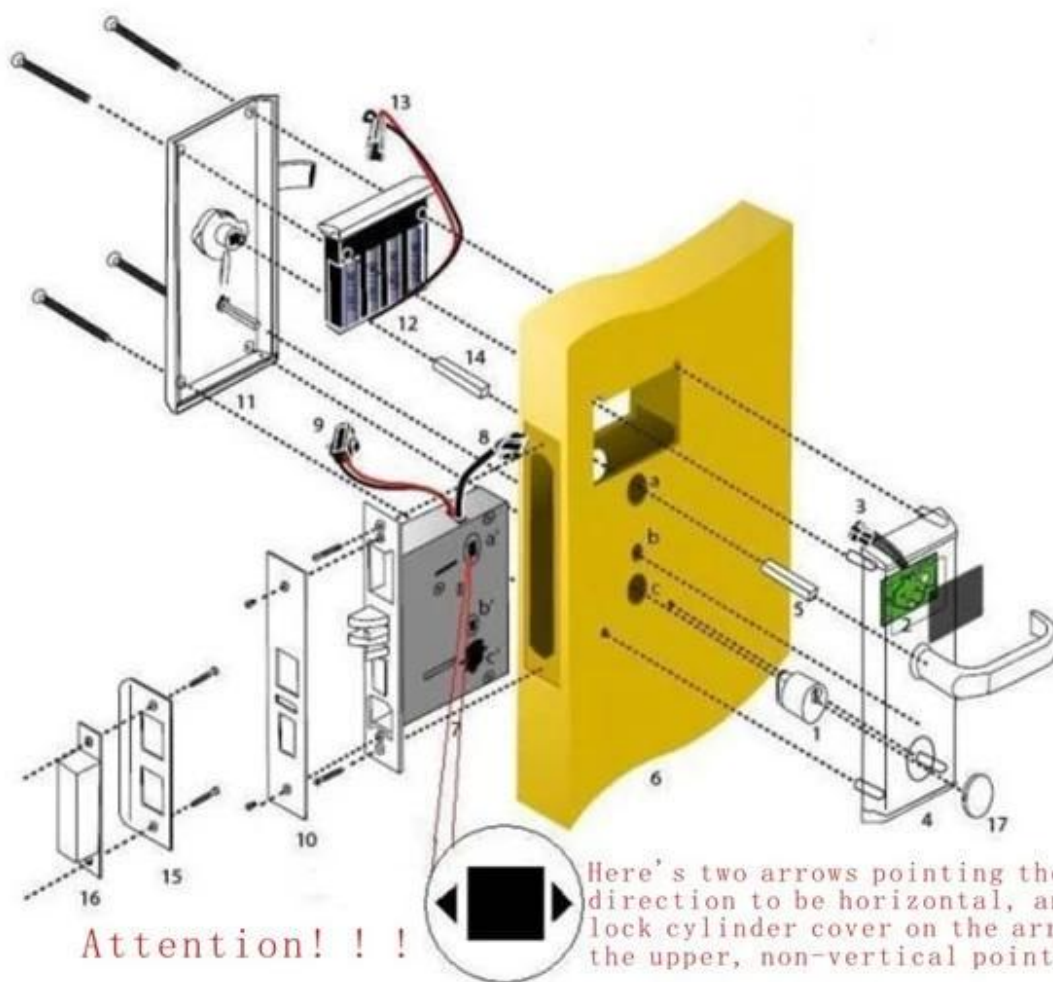

□□□□□□



□□□□□□□□□□



## lock

- 
- 
- 
- 
- 
- / /
- PC



**RF card**



**RF card reader**  
(used for issuing room card to guests)



**Data collector**



opening the door with RF card



collect opening records from hotel lock

proyu.en.alibaba.com