

RF

- A MIFARE® USB
- B USB
- C EM

1 Zink


2

3

4

Working voltage	6.0V (4 pieces of No.5 alkaline batteries)
Static current	$\leq 15 \mu\text{A}$
Card reading current	$\leq 20 \text{ mA}$
Lifespan of batteries	10 months or above
Indication of lacking voltage	4.8V
Induction distance	$>25\text{mm}$
Working temprature	$-20^{\circ}\text{C} \sim 70^{\circ}\text{C}$
Working humidity:	$\leq 80\%$

RF

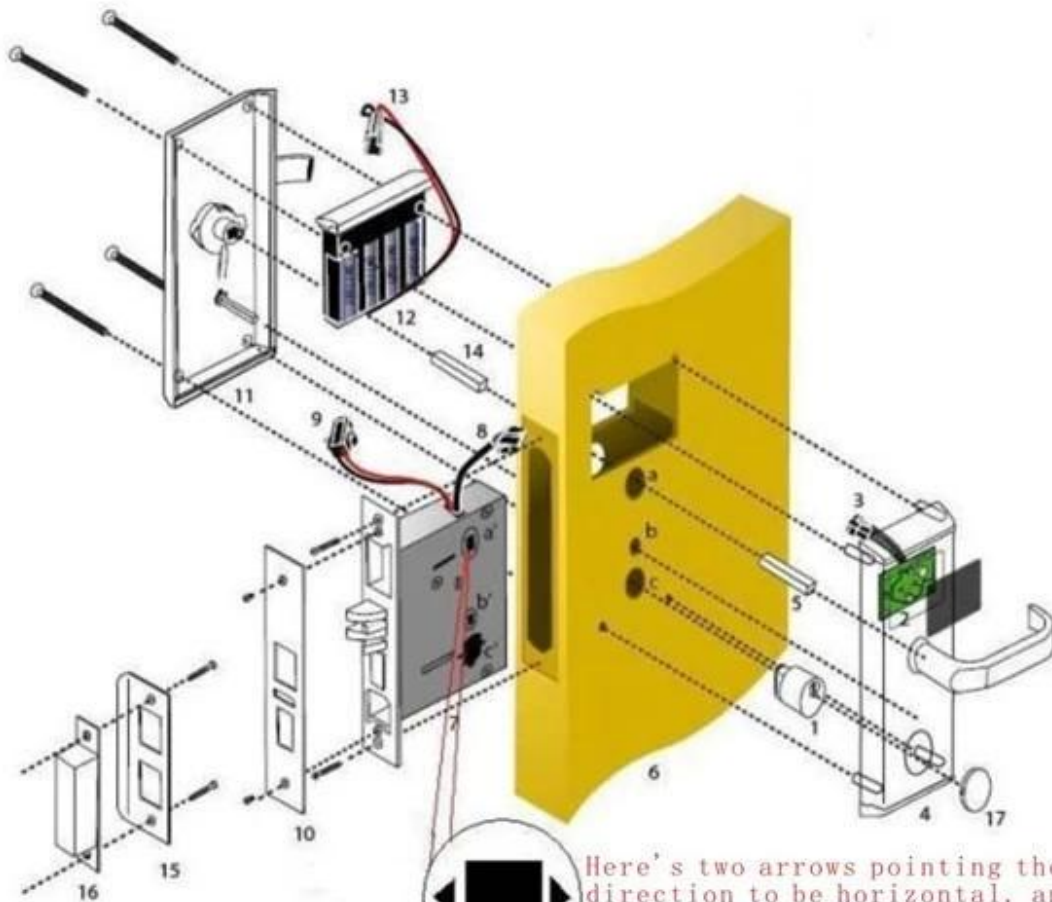

Attention!!!



Here's two arrows pointing the direction to be horizontal, and the lock cylinder cover on the arrow on the upper, non-vertical point!

RF



RF



lock

-
-
-
-
-
-
-



RF card



RF card reader
(used for issuing room card to guests)



Data collector



opening the door with RF card



collect opening records from hotel lock

RF card reader, data collector, opening the door with RF card, collect opening records from hotel lock