

Asistencia RF tiempo con control de acceso PY-SC403

Parámetros:

3
θ
r
j
e
t
a
d
e
i
d
e
n
t
i
f
i
c
a
c
i
ó
n
C
a
p
a
c
i
d
a
d
5
θ
p
a
c
i
d
a
d
d
e
l
a
t
r
a
n
s
a
c
c
i
ó
n

C
6
R
u
h
P
c
R
6
2
8
0
/
4
8
5
,
U
S
B
-
H
o
s
t

B
P
e
r
f
e
z
e
c
c
o
d
t
r
e
e
b
e
c
t
c
e
s
e
p
a
e
s
o
r
d
e
p
u
e
r
t
a
,
b
o
t
ó
n
d
e
s
a
l
i
d
a
,
a
l
a
r
m
a
,
p
u
e
r
t
a
B
e
l
l

S
e
ñ
a
l
a
&
W
m
p
e
n
t
r
a
d
a
A
n
t
i
p
e
s
e
b
e
s
k
á
s
M
s
r
P
u
o
x
i
m
i
n
e
a
d
p
W
o
o
k
e
b
e
e
,
s
e
r
v
i
d
o
r
w
e
b


U
C
D
u
a
l
i
z
a
c
i
ó
n
E
D
E
D
C
e
D
e
A
l
i
m
e
n
t
a
c
i
ó
n
T
E
m
P
E
r
t
u
r
a
d
e
f
u
n
c
i
o
n
a
m
i
e
n
t
o

El
%
m
a
%
a
d
d
e
f
u
n
c
i
o
n
a
m
i
e
n
t
o
D
2
h
e
5
x
9
5
x
4
B
*
W
*
H
)
m
m
P
e
K
G
B
r
u
t
o

Aplicación: hogar, oficina, escuela, gobierno, edificio, o para otros fines.



Standalone

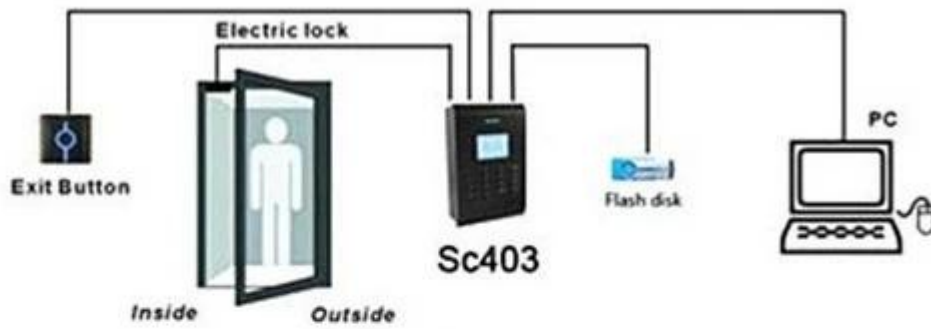

Network

