

Table with 2 columns: Property, Value

Table with 2 columns: Property, Value

Table with 2 columns: Property, Value

Table with 2 columns: Property, Value

Table with 2 columns: Property, Value

Table with 2 columns: Property, Value


Table with 2 columns: Property, Value

Table with 2 columns: Property, Value

Table with 2 columns: Property, Value

Table with 2 columns: Property, Value

Table with 2 columns: Property, Value

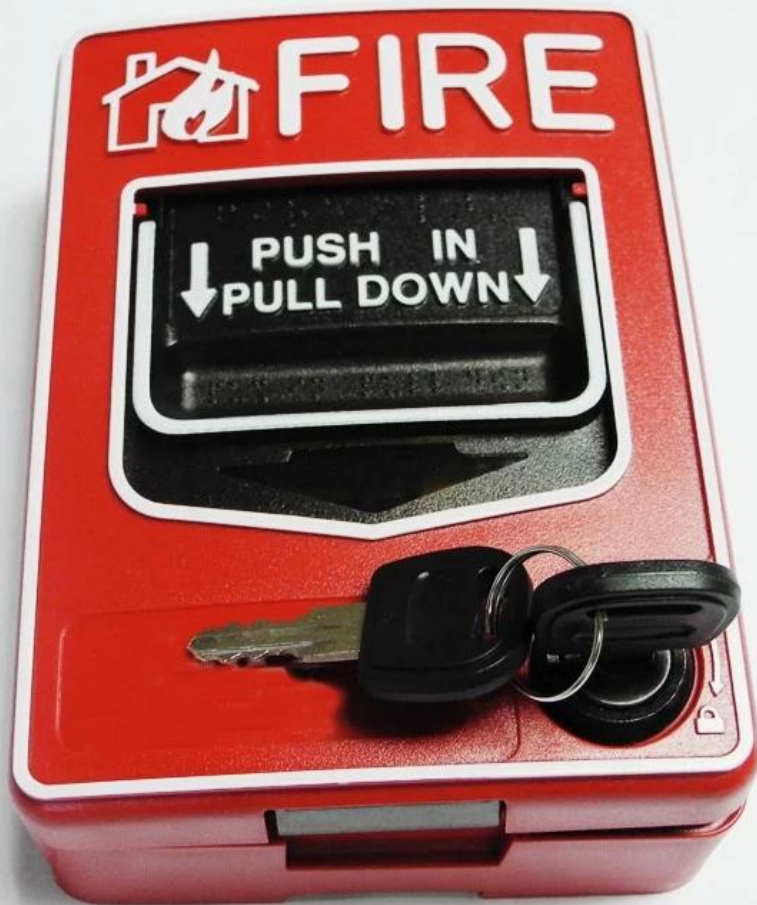



CONVENTIONAL MANUAL CALL POINT

Operating Voltage: 9V-28VDC  
Alarm Current:  $\leq 45\text{mA}$   
Operating Temp:  $-10^{\circ}\text{C}$ ~ $+50^{\circ}\text{C}$   
MFG No.: HCA9 1100146

