

DIY facile citofono installazione con funzione di sblocco PY-DP3208

Specifiche tecniche:

Collegamento a 2 fili.

Con la funzione di sblocco.

Anti-ossidazione, indossabile unità esterna in alluminio.

Il nome o la stanza Numero l'utente può essere visualizzato sull'unità esterna, unitamente alla segnalazione a LED.

Circuito di alta qualità a promettere nitida voce chiara.

Parlare distanza è superiore a 100 metri (2X0.75mm²).

Facile installazione fai da te

Immagine mostra:



ZHUDELE

○ ZDL-3207
○ ZDL-3208

Intercom Doorbell

gegensprechanlage mit türöffner
kaputelefon ajtónyitóval

EN DOORBELL WITH DOOR OPENING FUNCTION
• 2-wire system
• 2-wire system
• 2-wire system
• 2-wire system

B GEGENSPRECHANLAGE MIT TÜROFFNER
• 2-wire system
• 2-wire system
• 2-wire system
• 2-wire system

R KAPUTELEFON AJTÓNÝÍTÓVAL
• 2-wire system
• 2-wire system
• 2-wire system
• 2-wire system

CS DOMOVNÍ TELEFON S OVLÁDANÍM ELEKTRICKÉHO ZÁMKY
• 2-wire system
• 2-wire system
• 2-wire system
• 2-wire system

PL PRZEKŁADNIK Z ZAMKEM ELEKTRYCZYM
• 2-wire system
• 2-wire system
• 2-wire system
• 2-wire system


IT NOTIFON DE PARIATA CU DESCHEDEREA USII
• 2-wire system
• 2-wire system
• 2-wire system
• 2-wire system

SK INTERFON SA JEDINICOU ZA OTVARANIE DVERI
• 2-wire system
• 2-wire system
• 2-wire system
• 2-wire system

EN DOORBELL WITH FUNCTION OPENING DOOR
• 2-wire system
• 2-wire system
• 2-wire system
• 2-wire system

CS INTERFON SA OTVÁRANÍM VŘAT
• 2-wire system
• 2-wire system
• 2-wire system
• 2-wire system

SK VOCHODNÝ TELEFÓN S OTVÁRANOM DVERI
• 2-wire system
• 2-wire system
• 2-wire system
• 2-wire system

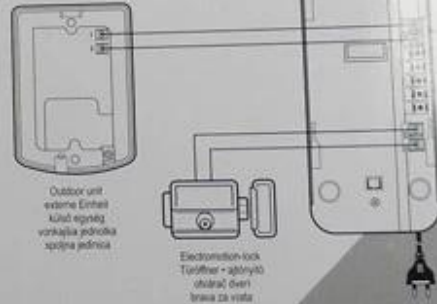

230 V~ / 50 Hz

TÜV
CE
ISO9001