

Frequenza di tempo di RF con controllo di accesso PY-SC403

Parametri:

B
θ
p
a
c
i
t
à
c
a
r
t
a
d
'
i
d
e
n
t
i
t
à
B
θ
p
a
c
i
t
à
d
i
t
r
a
n
s
a
z
i
o
n
e
C
6
Rn
u
h
p
c
B
S
2
B
B
E
4
8
5
,
U
S
B
-
H
o
s
t

E
h
e
e
t
f
o
s
e
r
a
d
t
o
o
a
B
p
b
t
b
d
t
e
c
s
e
s
s
o
p
e
p
o
r
t
a
,
p
u
l
s
a
n
t
e
d
i
u
s
c
i
t
a
,
p
o
r
t
a
c
a
m
p
a
n
e
l
l
o
d
i
a
l
l
a
r
m
e
,


Win
g
g
a
&
d
s
e
g
n
a
l
e
A
n
h
z
i
p
a
s
s
b
a
o
W
a
s
M
S
W
u
o
z
h
o
n
z
o
p
W
o
o
k
a
b
d
e
,
W
e
b
s
e
r
v
e
r
W
C
D
u
a
l
i
z
z
a
z
i
o
n
e

A
2
V
D
E
n
t
a
z
i
o
n
e
e
l
e
t
t
r
i
c
a
T
E
m
P
B
P
G
t
u
r
a
d
i
f
u
n
z
i
o
n
a
m
e
n
t
o
D
%
i
B
%
t
à
d
i
f
u
n
z
i
o
n
a
m
e
n
t
o

Applicazione: casa, ufficio, scuola, governo, edificio, o altri scopi.



Standalone

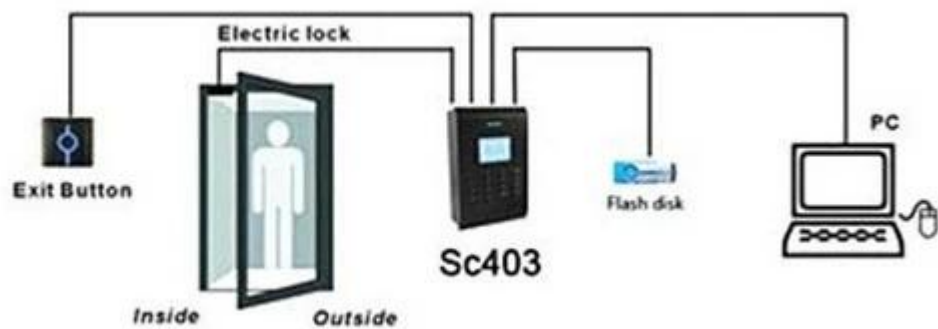

Network

