

Presenze RF con controllo di accesso PY-SC403

Parametri:

8
0
r
t
a
d
,
i
d
e
n
t
i
t
à
C
a
p
a
c
i
t
à
5
0
p
a
c
i
t
à
d
i
t
r
a
n
s
a
z
i
o
n
e
C
6
M
h
P
c
B
S
2
0
0
4
8
5
,
U
S
B
-
H
o
s
t

A
c
d
p
a
s
b
C
s
a
t
r
e
t
u
n
à
e
r
é
à
t
e
p
e
a
,
s
e
n
s
o
r
e
p
o
r
t
a
,
p
u
l
s
a
n
t
e
d
i
u
s
c
i
t
a
,
a
l
l
a
r
m
e
,
c
a
m
p
a
n
e
l
l
o
p
e
r
p
o
r
t
e


0
e
g
p
a
t
&
d
m
W
j
e
g
p
a
t
A
a
h
z
i
p
a
s
s
b
a
o
k
a
s
M
S
P
a
o
z
s
o
m
i
b
p
z
W
o
n
k
t
o
d
e
,
W
e
b
s
e
r
v
e
r
D
C
B
p
l
a
y

A
2
V
D
E
n
t
a
z
i
o
n
e
E
l
e
t
t
r
i
c
a
T
E
m
P
B
P
E
t
u
r
a
d
i
e
s
e
r
c
i
z
i
o
D
%
i
E
%
t
à
d
i
e
s
e
r
c
i
z
i
o
D
2
E
B
X
D
B
X
4
8
L
5
W
*
H
)
m
m

Applicazione: casa, ufficio, scuola, governo, edificio o altro scopo.



Standalone

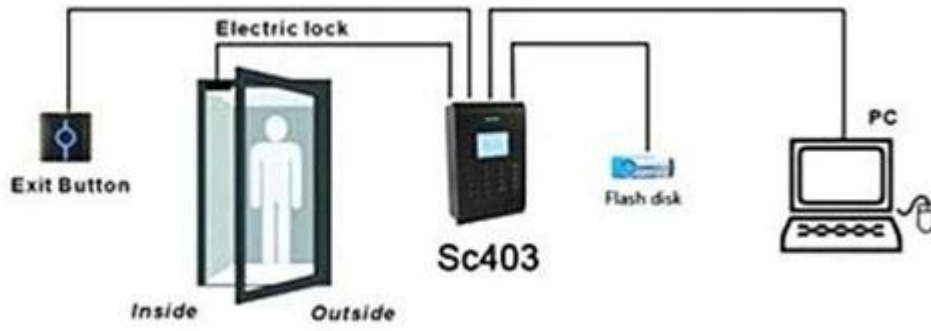

Network

