

**RF** 無線電波通訊模組規格說明書:

: Mifare ® 無線電波通訊模組 (USB 無線電波通訊模組)

B: 無線電波通訊模組 Temic (USB 無線電波通訊模組)

C: EM 無線電波通訊模組 (無線電波通訊模組)

無線電波通訊模組規格說明書

1 無線電波通訊模組規格說明書 Zink (無線電波通訊模組) 無線電波通訊模組規格說明書

2 無線電波通訊模組規格說明書 intellectual 無線電波通訊模組規格說明書


3 無線電波通訊模組規格說明書 無線電波通訊模組規格說明書

4 無線電波通訊模組規格說明書 無線電波通訊模組規格說明書

無線電波通訊模組規格說明書:

Working voltage	6.0V (4 pieces of No.5 alkaline batteries)
Static current	≤15 μA
Card reading current	≤20 mA
Lifespan of batteries	10 months or above
Indication of lacking voltage	4.8V
Induction distance	>25mm
Working temprature	-20`C~70`C
Working humidity:	≤80%

無線電波通訊模組規格說明書 **RF** 無線電波通訊模組

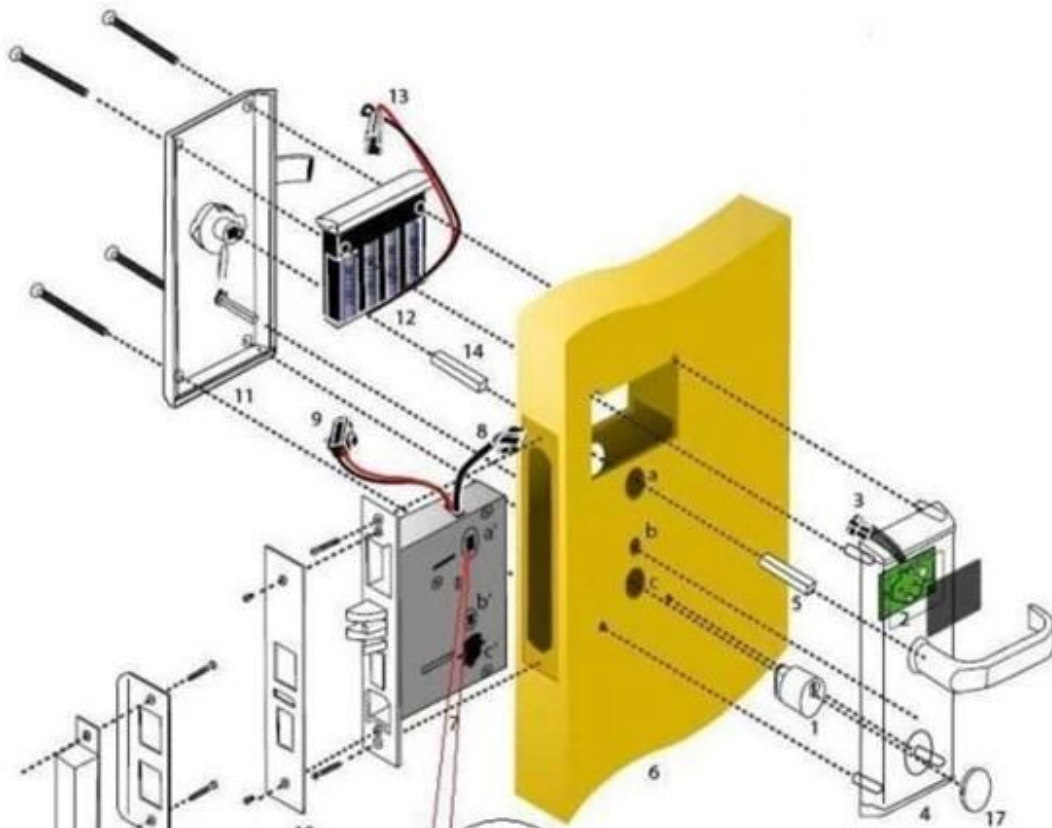

Attention!!! Here's two arrows pointing the direction to be horizontal, and the lock cylinder cover on the arrow on the upper, non-vertical point!

RF





□□□□□□□□ □ □□□□□□□□□□□□□□□□□□□









**RF card**



**RF card reader**  
(used for issuing room card to guests)



**Data collector**



opening the door with RF card



collect opening records from hotel lock